




Determining Chamber Load (Watts)

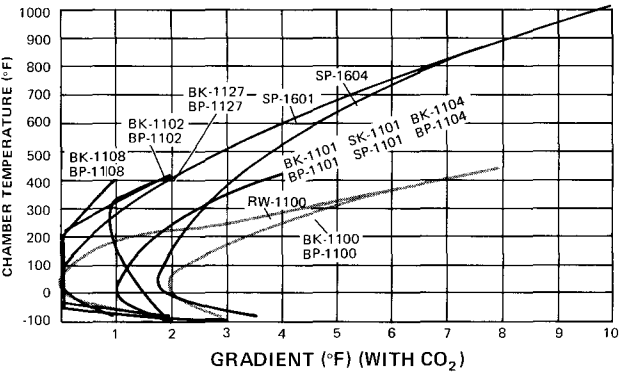

Approximate Chamber Load with Maintained Controlled Stability

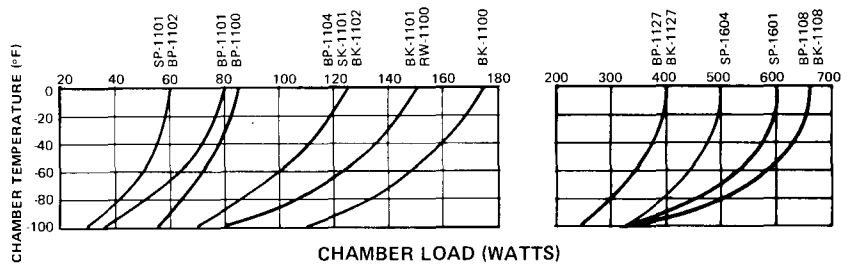

Determining CO₂ Consumption with Bottled CO₂ at 64 BTU/LB.

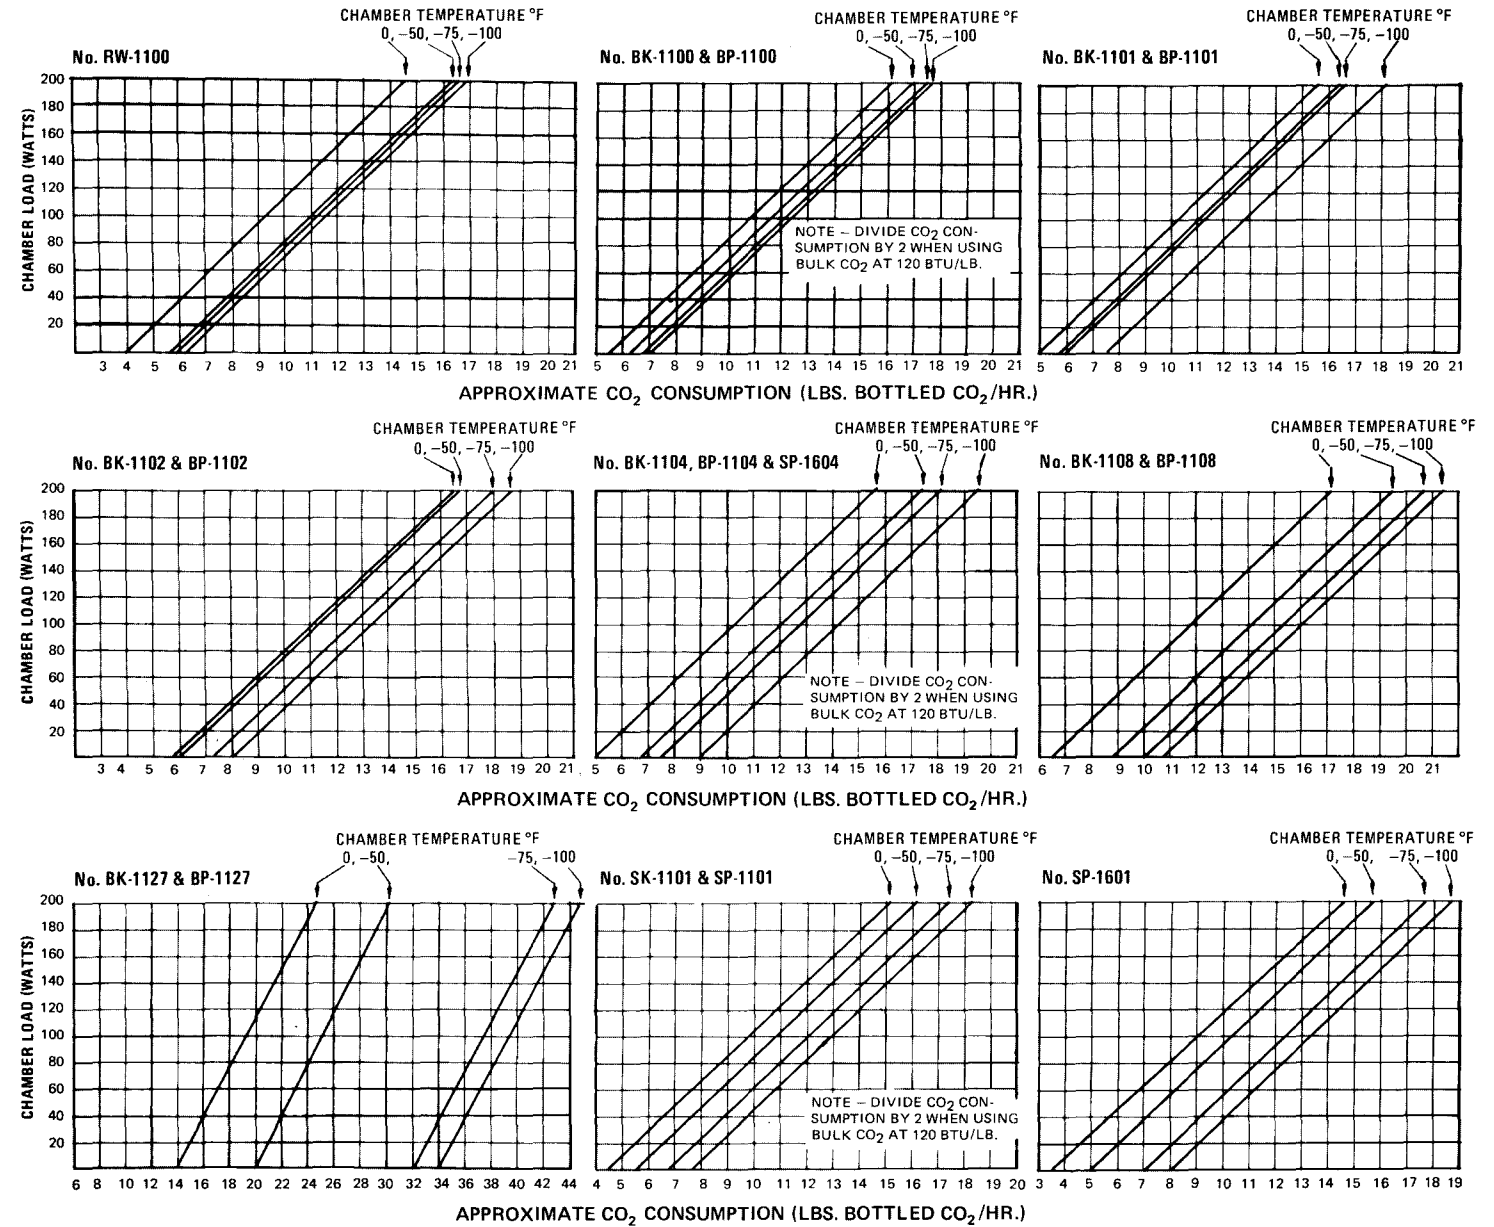

NOTE: When using LN₂ - consumption will be less than one half that of LCO₂.

In line with our corporate policy of continuing product improvement and quality control Associated reserves the right to change product specifications.

ASSOCIATED ENVIRONMENTAL SYSTEMS

Subsidiary of Kidde, Inc.

KIDDE

10 Industrial Way • P.O. Box 648 • Amesbury, MA 01913-4848 • Tel. 617-388-5662 • TWX # 710-347-0590